




- Protection against over-under voltage of AC network
- Automatic operation
- Re-engagement delayed
- Operating indicators
- Easy installation on DIN rail
- EN 50550 compliance

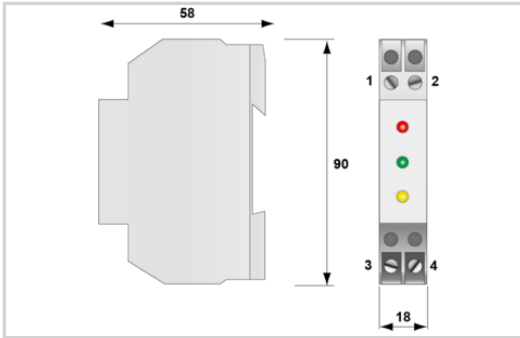

| Electrical Characteristics  |  |
|-----------------------------|--|
| Network                     | 120 V single-phase   |
| Mechanical Characteristics  |  |
| Disconnection               | Undervoltage: < 95 Vac Overvoltage:> 140 Vac Disconnection delay: 1 second Reset time: 1 second          |
| Format                      | DIN Box 1 module of 18 mm  |
| Voltage/operating indicator | Yellow LED: undervoltage (disconnection) Green LED: Correct voltage Red LED: overvoltage (disconnection) |
| Weight                      | 0.056 kg   |
| Standards                   |  |
| Standards compliance        | EN 50550   |
| Certification               |  |
| Part number                 |  |
| 3569012                     |  |