





CITEL

Type 1+2 AC surge protector - 3-phase+N

DS134R-230

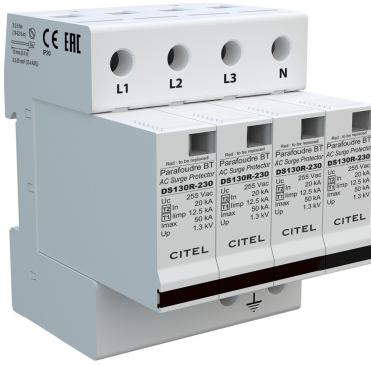

- Discover our latest innovation : the [DAC1-13-40-275](#)
- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp total : 50 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 compliance

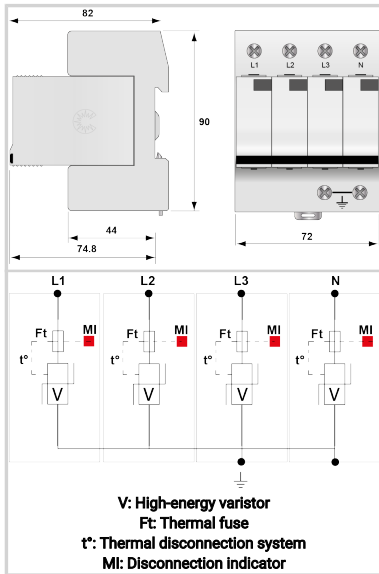

| Electrical Characteristics | | |
|--|---------|--|
| SPD type | IEC | 1+2 |
| Network | | 230/400 V 3-phase+N |
| AC system | | TNS |
| Nominal line voltage | Un | 230 Vac |
| Max. AC operating voltage | Uc | 255 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i> | UT | 335 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i> | UT | 440 Vac disconnection |
| Follow current | If | None |
| Nominal discharge current <i>15 x 8/20 μs impulses</i> | In | 20 kA |
| Max. discharge current <i>max. withstand @ 8/20 μs by pole</i> | Imax | 50 kA |
| Impulse current by pole <i>max. withstand 10/350μs by pole</i> | Iimp | 12.5 kA |
| Total lightning current <i>max. total withstand @ 10/350μs</i> | Itotal | 50 kA |
| Withstand on overvoltages IEEE C62.41.1 | | 20 kV |
| Specific energy by pole <i>max. withstand 10/350 μs</i> | W/R | 40 kJ/ohm |
| Connection mode(s) | | L/PE and N/PE |
| Protection mode(s) | | Common mode |
| Protection level N/PE <i>@ In (8/20μs)</i> | Up N/PE | 1.3 kV |
| Protection level L/PE <i>@ In (8/20μs)</i> | Up L/PE | 1.3 kV |
| Admissible short-circuit current | Iscrr | 25 000 A |
| Mechanical Characteristics | | |
| Technology | | MOV |
| SPD configuration | | 3-phase+Neutral |
| Connection to Network | | By screw terminals: 2.5-25mm ² / by bus |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole |
| Spare module(s) | | DSM130R-230 |
| Remote signaling of disconnection | | option DS134RS-230 : output on changeover contact |
| Dimensions | | See diagram |
| Disconnectors | | |
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | Fuses Type gG - 125 A |
| Standards | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | |
| Part number | | |
| 571504 | | |

