




CITEL

Protection of video surveillance systems against overvoltages

MSP-VM230

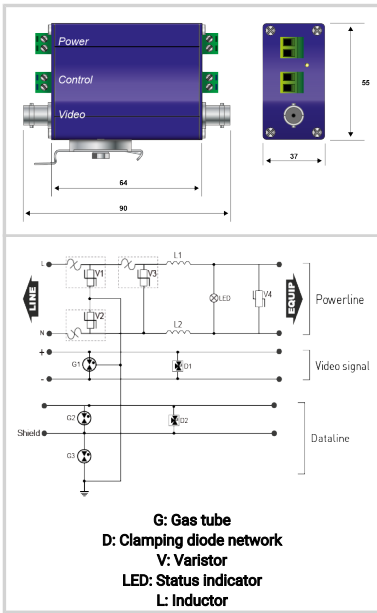

Electrical Characteristics

SPD type	IEC	2+3
Network		230 V single-phase
Max. DC operating voltage	Uc	255 Vdc
Insertion loss		< 0.1 dB
Max. load current @25°C	IL	5 A
Nominal discharge current <i>15 x 8/20 μs impulses</i>	In	5 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	10 kA
Nominal discharge current <i>C2 Category</i>	In	2.5 kA
Withstand on Combination waveform IEC 61643-11 <i>Class III test: 1.2/50μs - 8/20μs</i>	Uoc	10 kV / 5 kA
Protection mode(s)		Common/Differential mode
Protection level <i>@ In (8/20μs)</i>	Up	1.2 kV
Protection level <i>C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)</i>	Up	1.2 kV
Protection level <i>C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)</i>	Up	1.2 kV

ELEC

Max. frequency	f max.	100 Mhz
----------------	--------	---------

Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5mm² max.
Format		DIN rail or flange
Mounting		DIN rail or plate (flange)
Housing material		Anodized aluminum
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and Power cut off
Disconnection indicator		Green LED OFF and line cut off
Operating indicator		Green led(s) on
Dimensions		See diagram

Disconnectors

Thermal disconnector		Internal
----------------------	--	----------

Standards

Standards compliance		IEC 61643-21 / EN 61643-21
----------------------	--	----------------------------

Part number

420401

