





- ✦ Type 2 (or 3) AC one-phase surge protector
- ✦ In : 5 kA
- ✦ Imax : 10 kA
- ✦ Pluggable module by phase
- ✦ Remote signaling option
- ✦ EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

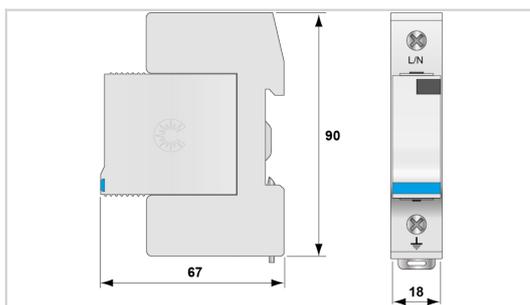

V: High-energy varistor
 Ft: Thermal fuse
 t*: Thermal disconnection system
 MI: Disconnection indicator

Electrical Characteristics			
SPD type	IEC		2+3
Network			230/400 V
Nominal line voltage	Un		230 Vac
Max. AC operating voltage	Uc		255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT		335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT		440 Vac disconnection
Residual Current Leakage current to Ground	Ipe		< 0.5 mA
Follow current	If		None
Nominal discharge current 15 x 8/20 μs impulses	In		5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax		10 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total		10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc		10 kV
Withstand on overvoltages IEEE C62.41.1			10 kV
Connection mode(s)			L/N or N/PE
Protection mode(s)			Common Mode or Differential Mode
Protection level @ In (8/20μs)	Up		0.9 kV
Admissible short-circuit current	Iscrr		25 000 A
Mechanical Characteristics			
Technology			MOV
SPD configuration			Single phase
Connection to Network			By screw terminals: 2.5-25mm ² / by bus
Format			Plug-in modular box
Mounting			Symmetrical rail 35 mm (EN 60715)
Housing material			Thermoplastic UL94 V-0
Operating temperature	Tu		-40/+85°C
Protection rating			IP20
Failsafe mode			Disconnection from AC network
Disconnection indicator			1 mechanical indicator
Spare module(s)			DSM10-230
Remote signaling of disconnection			option DS11S-230 : output on changeover contact
Dimensions			See diagram
Disconnectors			
Thermal disconnector			Internal
Installation ground fault breaker			Type 'S' or delayed
Back-up protection device			20 A min. - 125 A max. - Fuses type gG
Standards			
Standards compliance			IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification			UL Recognized
Part number			
341501			