


- ✦ Re-inforced Type 2 AC Multipolar surge protector
- ✦ In: 30 kA
- ✦ I_{max} total: 210 kA
- ✦ Pluggable module by phase
- ✦ IEC 61643-11, EN 61643-11 compliance
- ✦ UL1449 ed.5 approved

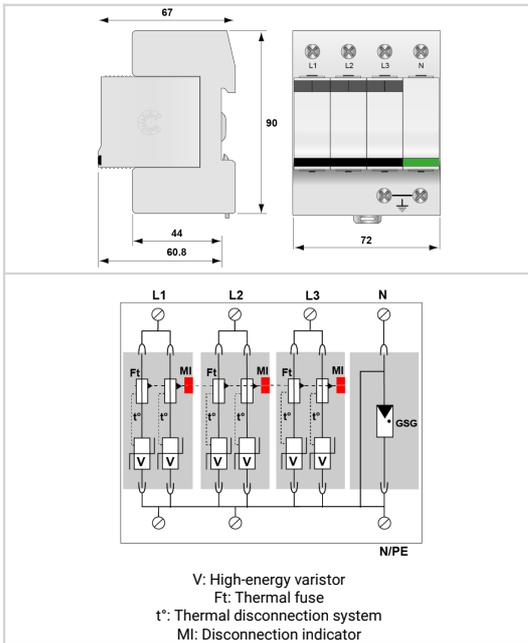

Electrical Characteristics		
SPD type	IEC	2
Network		690 V 3-phase+N
AC system		TNC
Nominal line voltage	Un	690 Vac
Max. AC operating voltage	Uc	840 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	700 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	920 Vac disconnection
Residual Current Leakage current to Ground	I _{pe}	< 3 mA
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	30 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	70 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	210 kA
Connection mode(s)		L/PE
Protection mode(s)		Common mode
Protection level L/PE @ I _n (8/20μs)	Up L/PE	1.8 kV
Admissible short-circuit current	I _{scrr}	25 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		2 mechanical indicators by pole
Spare module(s)		DSM70R-600
Dimensions		See diagram
Disconnectors		
Thermal disconnecter		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		100 A min. - 125 A max. - Fuses type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		UL Recognized
Part number		
321503		