





# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLAWTS1-170/R

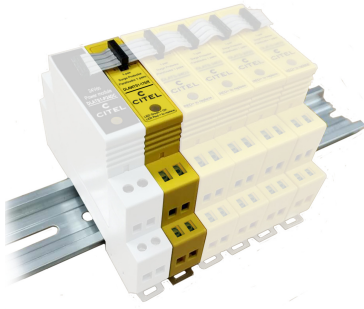

- Surge protection for 1-pair
- Pluggable protection module
- Optical fault indication
- Remote signalling (DLAWTS1-48DC required for power supply)
- Indirect shield connection
- Indirect earthing
- Signal interruption when module is disconnected
- Conforms to IEC 61643-21, VDE 0845-3-1 and UL497B

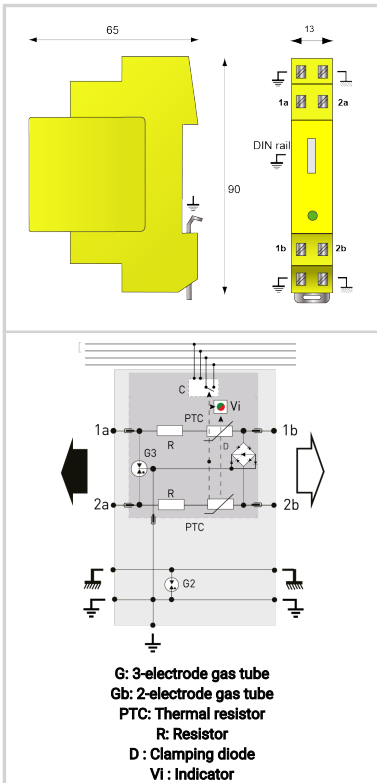

#### Electrical Characteristics

Network		RTC, ADSL2, VDSL2
Nominal line voltage	Un	150 V
Max. DC operating voltage	Uc	170 Vdc
Max. frequency	f max.	10 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	300 mA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	20 kA
Nominal discharge current <i>C2 Category</i>	In	5 kA
Nominal Discharge Current, X-C (Line/Earth) <i>8/20 μs Test x 10 - C2 Category</i>	In L/PE	5 kA
Protection mode(s)		Common/Differential mode
Protection Level <i>C3 (10/1000 μs), 300 applications@10 A, Y-Y (Line/Line)</i>	Up	220 V
Protection Level <i>C3 (10/1000 μs), 300 applications@10 A, Y-C (Line/Earth)</i>	Up	220 V
Max. capacitance	C	< 50 pF
Impulse current <i>D1 (10/350 μs), 2 applications, X-C (Line/Earth)</i>	Iimp	5 kA
Line/Line Nominal discharge current <i>C2 Category</i>	In L/L	5 kA
Line resistance (± 10%)		4.7 Ohm

#### Mechanical Characteristics

Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		Spring terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Specific version with line cut-off in case of removal plug-in module
With line cut-off in case of removal plug-in module		Yes
Disconnection indicator		Red light on
Spare module(s)		DLAWTS1M-170
Remote signaling of disconnection		Trough control module
Connection bus		SPD connection/control module by bus: bus 1+4 (1 control module+4 SPD), bus 1+9, bus 1+24 and bus 1+48
Dimensions		See diagram

#### Standards

Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Environmental standards		EU RoHS

#### Part number

<b>6421054</b>
----------------

