
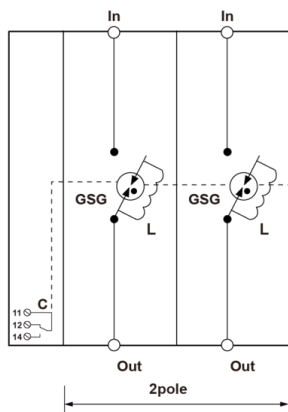


- ✦ SPD Specific Disconnectors (SSD) for short circuit protection of Type 2 AC surge protectors
- ✦ Surge current withstand: 40 kA @ 8/20µs
- ✦ Wide range of short circuit current protected
- ✦ Reusable after switch triggered
- ✦ Low rated tripping current with time-current characteristics for overcurrent coordination with upstream OCPD and safety disconnect in case of SPD failure



Electrical Characteristics

Rated impulse withstand voltage	Uimp	4 kV
Minimum delay tripping current	Id	3A@<5s
Minimum instantaneous tripping current	Ii	5A@<0.1s
Nominal line voltage	Un	230 Vac
Nominal discharge current 15 x 8/20 µs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	40 kA
Equivalent rated AC current		63 A
Breaking capacity		100 000 A
Residual voltage	Up	< 2.3 kV (+SPD)
Rated insulation voltage	Ui	400 Vac

Mechanical Characteristics

Format	Monobloc modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Remote signaling of disconnection	Output on changeover contact
Wiring for remote signaling	0.75 mm² max.
Max. Voltage/Current for remote signaling	240 V / 2 A (AC) , 24 V / 6 A (DC)
Remote signaling of disconnection via control module	With attached separated module
Dimensions	See diagram - 1TE (EN43880)

Standards

Standards compliance	GB/T 18802.11 / IEC 61643-11 / NB/T 42150
Certification	CQC

Part number

805112