





CITEL

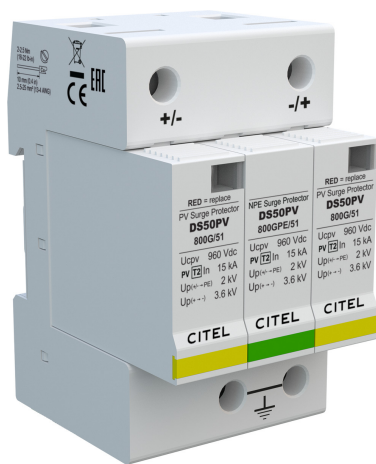

Type 2 PV surge protector

DS50PV-800G/51

- › Type 2 surge protector for PV
- › PV voltage: 800 Vdc
- › In : 15 kA
- › I_{max} : 40 kA
- › Pluggable module
- › Remote signaling (option)
- › UTE C61-740-51, EN 50539-11 compliance

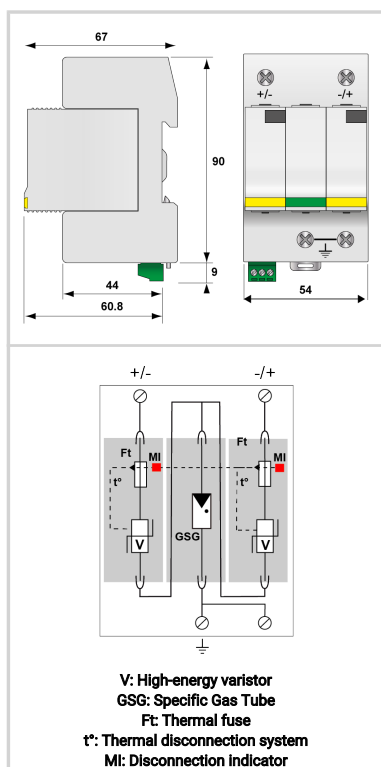

Electrical Characteristics

SPD type	IEC	2
Network		PV network 800 Vdc
Nominal PV voltage	U _{ocstc}	800 Vdc
Max. PV operating voltage	U _{cpv}	960 Vdc
Residual Current		
Leakage current to Ground	I _{pe}	None
PV Permanent Operating current	I _{cpv}	< 0.1 mA
Current consumption at U _{cpv}		
Follow current	I _f	None
Nominal discharge current	I _n	15 kA
15 x 8/20 μ s impulses		
Max. discharge current	I _{max}	40 kA
max. withstand @ 8/20 μ s by pole		
Total Maximum discharge current	I _{max} Total	60 kA
max. total withstand @ 8/20 μ s		
Current withstand short circuit PV	I _{scpv}	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/-		
@ I _n (8/20 μ s)	U _p	3.6 kV
Protection level +/-PE (-/PE)		
@ I _n (8/20 μ s)	U _p	2 kV

Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5-25mm ²
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		2 mechanical indicators - Red/Green
Spare module(s)		DSM50PV-800G/51 / DSM50PV-800GPE/51
Remote signaling of disconnection		Option DS50PVS-800G/51 - output on changeover contact
Dimensions		See diagram

Disconnectors

Thermal disconnector		Internal
Back-up protection device		Without

Standards

Standards compliance		EN 61643-31 / EN 50539-11
Certification		

Part number

480281

