




# CITEL

## Coaxial surge protector DC-7 GHz

### P8AX09-6G-N/MF



- RF coaxial surge protector
- DC-7 GHz
- 25 W
- Connectors : N
- Low insertion loss
- Removable GDT
- DC-pass
- Bi-directional protection

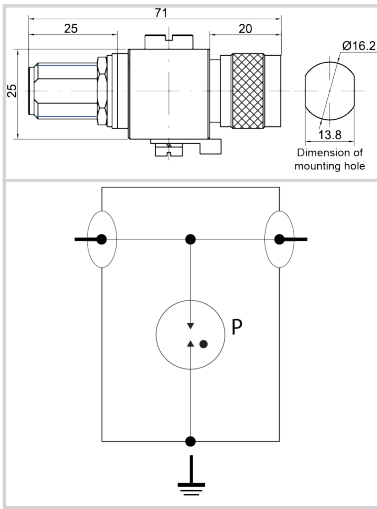

#### Electrical Characteristics

Max. DC operating voltage	Uc	120 Vdc
Frequency range	f	DC-6 GHz
Insertion loss		< 0.2 dB
Return loss		> 19 dB
Impedance		50 ohms
VSWR		<1.25:1
Max. load current @25°C	IL	10 A
Max. discharge current <i>max. withstand @ 8/20 <math>\mu</math>s by pole</i>	I <sub>max</sub>	15 kA
Nominal discharge current <i>C2 Category</i>	I <sub>n</sub>	5 kA
Protection mode(s)		Common mode
Protection level <i>@ I<sub>n</sub> (8/20<math>\mu</math>s)</i>	U <sub>p</sub>	< 1100 V
Impulse current <i>2 x 10/350<math>\mu</math>s Test - D1 Category</i>	I <sub>imp</sub>	1 kA
Max Power		25 W
Typical let through energy <i>(50 ohms) input 4kV 1.2/50<math>\mu</math>s - 2kA 8/20<math>\mu</math>s</i>		2.2 mJ
DC Pass		Yes
Insulation resistance	IR	$\geq 10$ GOhms

#### Mechanical Characteristics

Technology		Gas discharge tube
Connection to Network		Connector N Male/Female
Mounting		Feedthrough
Housing material		Brass/Surface plating: Cu Zn Sn
Operating temperature	Tu	-40/+85°C
Protection rating		IP65
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt
Spare module(s)		1 x BA HF
Dimensions		See diagram
Contacts		Bronze/Surface Au-Ag

#### Standards

Standards compliance		IEC 61643-21 / EN 61643-21 / UL497E
Environmental standards		EU RoHS
RohS compliance		Yes

#### Part number

<b>68001</b>
--------------



CITEL

