




CITEL



Type 2 N/PE surge protector

DS40G-600

- ▶ Discover our latest innovation : the [DAC50G-10-440](#)
- ▶ Type 2 AC Multipolar surge protector
- ▶ In : 20 kA
- ▶ Imax total : 40 kA
- ▶ Pluggable module for each phase
- ▶ Remote signaling option
- ▶ EN 61643-11, IEC 61643-11 compliance
- ▶ UL1449 ed.5

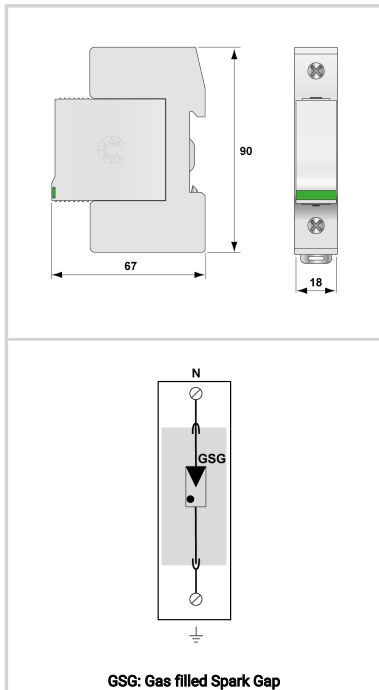

Electrical Characteristics		
SPD type	IEC	2
Network		230/400 V
Max. AC operating voltage	Uc	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	Yes
Nominal discharge current 15 x 8/20 μs impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	40 kA
Protection level @ In (8/20μs)	Up	1.5 kV
Admissible short-circuit current	Iscsr	25 000 A
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		By screw terminals: 4-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Spare module(s)		DSM40G-600
Dimensions		See diagram
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		cRUus
Environmental standards		EU RoHS
Part number		
381813		

