




- Discover our latest innovation : the [DAC1-13-30-150](#)
- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp total : 37.5 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 compliance

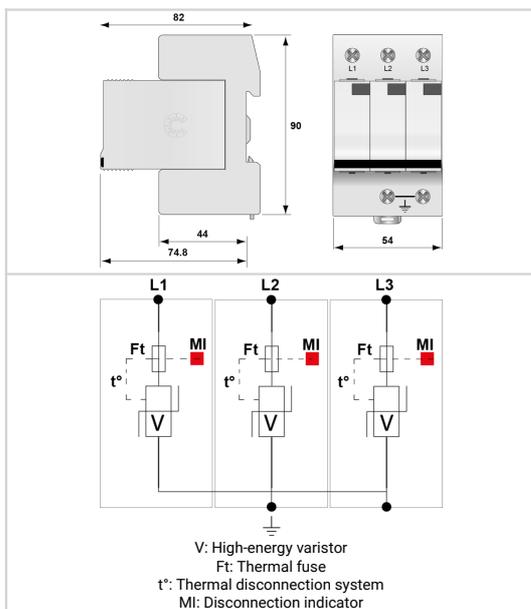

Electrical Characteristics			
SPD type	IEC		1+2
Network			120/208 V 3-phase
AC system			TNC
Nominal line voltage	Un		120 Vac
Max. AC operating voltage	Uc		150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT		180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT		230 Vac disconnection
Follow current	If		None
Nominal discharge current 15 x 8/20 µs impulses	In		20 kA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax		50 kA
Impulse current by pole max. withstand 10/350µs by pole	Iimp		12.5 kA
Total lightning current max. total withstand @ 10/350µs	Itotal		37.5 kA
Withstand on overvoltages IEEE C62.41.1			20 kV
Specific energy by pole max. withstand 10/350 µs	W/R		40 kJ/ohm
Connection mode(s)			L/PE
Protection mode(s)			Common mode
Protection level L/PE @ In (8/20µs)	Up L/PE	1.2 kV	
Admissible short-circuit current	Iscsr		25 000 A
Mechanical Characteristics			
Technology			MOV
SPD configuration			3-phase
Connection to Network			By screw terminals: 2.5-25mm ² / by bus
Format			Plug-in modular box
Mounting			Symmetrical rail 35 mm (EN 60715)
Housing material			Thermoplastic UL94 V-0
Operating temperature	Tu		-40/+85°C
Protection rating			IP20
Failsafe mode			Disconnection from AC network
Disconnection indicator			1 mechanical indicator by pole
Spare module(s)			DSM130R-120
Remote signaling of disconnection			option DS133RS-120 : output on changeover contact
Dimensions			See diagram
Disconnectors			
Thermal disconnector			Internal
Installation ground fault breaker			Type 'S' or delayed
Back-up protection device			Fuses Type gG - 125 A
Standards			
Standards compliance			IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification			
Part number			
			571603