


DS72R-48DC



- ✦ 2-poles surge protector 48 Vdc
- ✦ Type 1 et Type 2
- ✦ In 30 kA / I_{max} 70 kA
- ✦ Remote signaling
- ✦ I_{imp} 7 kA
- ✦ Pluggable Module
- ✦ IEC 61643-11, EN61643-11 and UL1449 ed.5 compliance

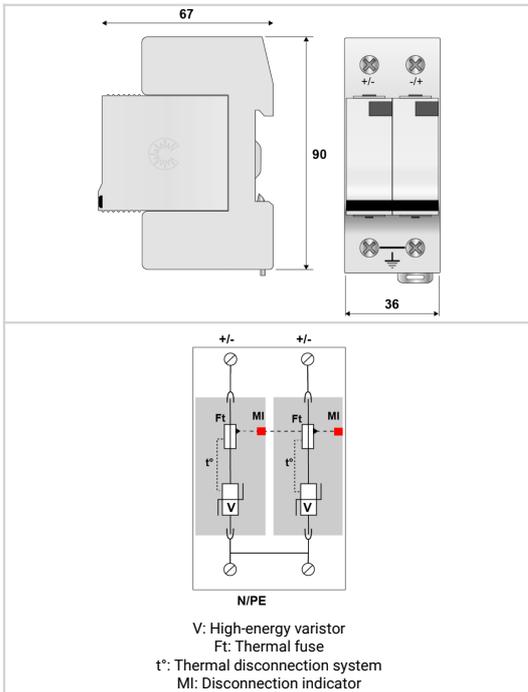

| Electrical Characteristics | | |
|---|---------------------------|---|
| SPD type | IEC | 1+2 |
| Network | | 48 Vdc |
| Nominal line voltage | U _n | 48 Vdc |
| Nominal DC voltage | U _{n-dc} | 48 Vdc |
| Max. DC operating voltage | U _c | 65 Vdc |
| Follow current | I _f | None |
| Nominal discharge current 15 x 8/20 μs impulses | I _n | 30 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 70 kA |
| Total Maximum discharge current max. total withstand @ 8/20 μs | I _{max} Total | 140 kA |
| Impulse current by pole max. withstand 10/350μs by pole | I _{imp} | 7 kA |
| Total lightning current max. total withstand @ 10/350μs | I _{total} | 14 kA |
| Connection mode(s) | | +/-PE and -/PE |
| Protection mode(s) | | Common mode |
| Protection level +/-PE (-/PE) @ I _n (8/20μs) | U _p | 300 V |
| Mechanical Characteristics | | |
| Technology | | MOV |
| SPD configuration | | 2-poles |
| Connection to Network | | By screw terminals: 4-25mm ² |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | T _u | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from DC network |
| Disconnection indicator | | 2 mechanical indicators |
| Spare module(s) | | DSM70R-48DC |
| Remote signaling of disconnection | | DS72RS-48DC option : output on changeover contact |
| Dimensions | | See diagram |
| Disconnectors | | |
| Thermal disconnector | | Internal |
| Back-up protection device | | 100 A min. - 125 A max. - Fuses type gG |
| Standards | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Part number | | |
| 492101 | | |