


- ✦ Discover our latest innovation : the [DAC15C-30-150](#)
- ✦ Type 2 (or 3) AC Multipolar surge protector
- ✦ In : 5 kA
- ✦ Imax total: 30 kA
- ✦ Pluggable module by phase
- ✦ Remote signaling option
- ✦ EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

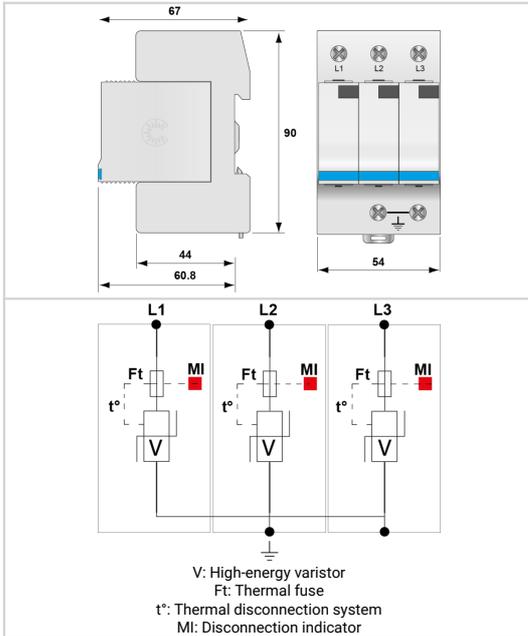

Electrical Characteristics			
SPD type	IEC		2+3
Network			120/208 V 3-phase
AC system			TNC
Nominal line voltage	Un		120 Vac
Max. AC operating voltage	Uc		150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT		180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT		230 Vac disconnection
Residual Current Leakage current to Ground	Ipe		< 1.5 mA
Follow current	If		None
Nominal discharge current 15 x 8/20 µs impulses	In		5 kA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax		10 kA
Total Maximum discharge current max. total withstand @ 8/20 µs	Imax Total		30 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	Uoc		10 kV
Withstand on overvoltages IEEE C62.41.1			10 kV
Connection mode(s)			L/PE
Protection mode(s)			Common mode
Protection level L/PE @ In (8/20µs)	Up L/PE	0.6 kV	
Admissible short-circuit current	Iscsr		25 000 A
Mechanical Characteristics			
Technology			MOV
SPD configuration			3-phase
Connection to Network			By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format			Plug-in modular box
Mounting			Symmetrical rail 35 mm (EN 60715)
Housing material			Thermoplastic UL94 V-0
Operating temperature	Tu		-40/+85°C
Protection rating			IP20
Failsafe mode			Disconnection from AC network
Disconnection indicator			1 mechanical indicator by pole
Spare module(s)			DSM10-120
Remote signaling of disconnection			option DS13S-120 : output on changeover contact
Dimensions			See diagram
Disconnectors			
Thermal disconnector			Internal
Installation ground fault breaker			Type 'S' or delayed
Back-up protection device			20 A min. - 125 A max. - Fuses type gG
Standards			
Standards compliance			IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification			UL Recognized
Part number			
341603			