




# CITEL

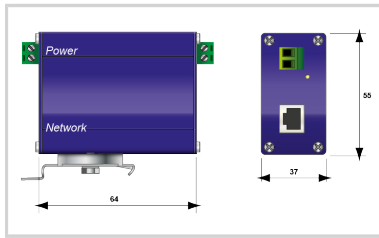

## MSP-VM24/R

- Security camera surge protector
- AC + Cat.5 (connector RJ45)
- Compact aluminium housing
- Rail DIN mounting or plate



### Electrical Characteristics

SPD type	IEC	2+3
Network		24 Vac/Vdc
Nominal line voltage	Un	24 Vac/Vdc
Max. DC operating voltage	Uc	30 Vac/Vdc
Insertion loss		< 1 dB
Max. load current @25°C	IL	5 A
Max. load current @25°C	IL	300 mA
Nominal discharge current 15 x 8/20 μs impulses	In	5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	10 kA
Nominal discharge current C2 Category	In	2.5 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc	10 kV / 5 kA
Protection mode(s)		Common/Differential mode
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	220 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	220 V
Protection level L/N @ In (8/20μs)	Up L/N	20 V
Protection level L/PE @ In (8/20μs)	Up L/PE	20 V

### ELEC

Protection level @ In (8/20μs)	Up	20 V
--------------------------------	----	------

### ELEC

Network		4 pairs Ethernet 100 Base-TX
---------	--	------------------------------

### ELEC

Max. DC operating voltage	Uc	8 Vdc
---------------------------	----	-------

### ELEC

Max. frequency	f max.	125 MHz
----------------	--------	---------

### ELEC

Insertion loss		< 1dB
----------------	--	-------

### ELEC

Max. discharge current max. withstand @ 8/20 μs by pole	Imax	5 kA
---	------	------

### ELEC

Nominal discharge current C2 Category	In	2.5 kA
---------------------------------------	----	--------

### ELEC

Protection level @ In (8/20μs)	Up	20 V
--------------------------------	----	------

### ELEC

Protection level L/N @ In (8/20μs)	Up L/N	20 V
------------------------------------	--------	------

### ELEC

Protection level L/PE @ In (8/20μs)	Up L/PE	20 V
-------------------------------------	---------	------

### Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5mm <sup>2</sup> max.
Format		DIN rail or flange
Mounting		DIN rail or plate (flange)
Housing material		Anodized aluminum
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and Power cut off
Disconnection indicator		Green LED OFF and line cut off
Operating indicator		Green Led ON
Dimensions		See diagram

### Disconnectors

Thermal disconnector		Internal
----------------------	--	----------

### Standards



# CITEL

## MSP-VM24/R

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
<b>Part number</b>	
<b>420412</b>	

