


# *Type 1+2 AC surge protector single-phase*

## DS132R-230

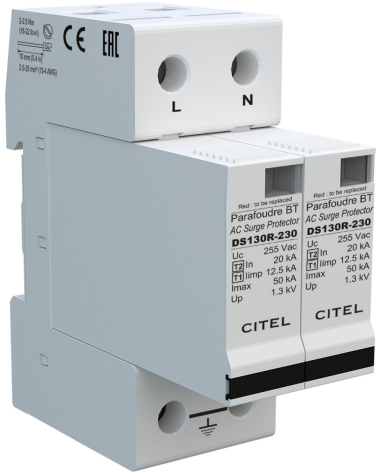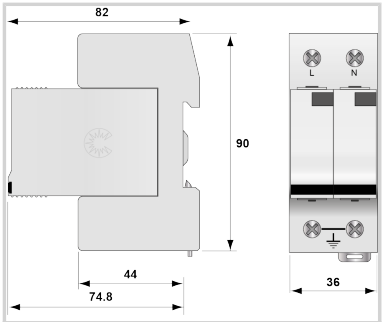


- **Discover our latest innovation : the DAC1-13-20-275**
- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp total : 25 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 compliance

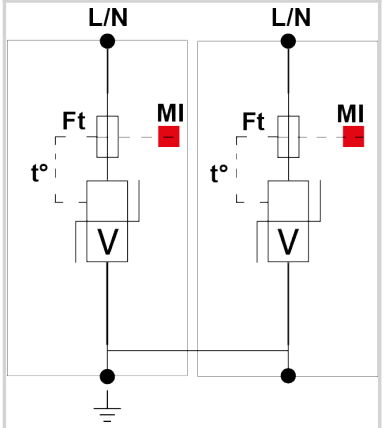


**V: High-energy varistor**
**Ft: Thermal fuse**
**t°: Thermal disconnection system**
**MI: Disconnection indicator**

| | | |
|---|---|---|
| **Electrical Characteristics** | | |
| SPD type | IEC | 1+2 |
| Network | | 230/400V |
| AC system | | TN |
| Nominal line voltage | Un | 230 Vac |
| Max. AC operating voltage | Uc | 255 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec.<br>*Without disconnection* | UT | 335 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn<br>*Without disconnection or with safety disconnection* | UT | 440 Vac disconnection |
| Follow current | If | None |
| Nominal discharge current<br>*15 x 8/20 µs impulses* | In | 20 kA |
| Max. discharge current<br>*max. withstand @ 8/20 µs by pole* | Imax | 50 kA |
| Impulse current by pole<br>*max. withstand 10/350µs by pole* | Iimp | 12.5 kA |
| Total lightning current<br>*max. total withstand @ 10/350µs* | Itotal | 25 kA |
| Withstand on overvoltages IEEE C62.41.1 | | 20 kV |
| Specific energy by pole<br>*max. withstand 10/350 µs* | W/R | 40 kJ/ohm |
| Connection mode(s) | | L/PE and N/PE |
| Protection mode(s) | | Common mode |
| Protection level N/PE<br>*@ In (8/20µs)* | Up N/PE | 1.3 kV |
| Protection level L/PE<br>*@ In (8/20µs)* | Up L/PE | 1.3 kV |
| Admissible short-circuit current | Isccr | 25 000 A |
| **Mechanical Characteristics** | | |
| Technology | | MOV |
| SPD configuration | | Single phase |
| Connection to Network | | By screw terminals: 2.5-25mm² / by bus |
| Format | | Plug-in modular box |
| Mounting | | Symmetrical rail 35 mm (EN 60715) |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Failsafe mode | | Disconnection from AC network |
| Disconnection indicator | | 1 mechanical indicator by pole |
| Spare module(s) | | DSM130R-230 |
| Remote signaling of disconnection | | option DS132RS-230 : output on changeover contact |
| Dimensions | | See diagram |
| **Disconnectors** | | |
| Thermal disconnector | | Internal |
| Installation ground fault breaker | | Type 'S' or delayed |
| Back-up protection device | | Fuses Type gG - 125 A |
| **Standards** | | |
| Standards compliance | | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | | |
| **Part number** | | |
| **571502** | | |