





Type 2 AC surge protector - 3-phase+N

CITEL

DS44-385

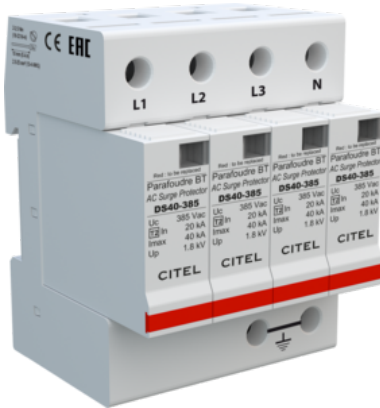

- ↳ Discover our latest innovation : the [DAC50-40-440](#)
- ↳ Type 2 AC Multipolar surge protector
- ↳ In : 20 kA
- ↳ I_{max} total : 160 kA
- ↳ Pluggable module for each phase
- ↳ Remote signaling option
- ↳ NF EN 61643-11, IEC 61643-11 compliance
- ↳ UL1449 ed.5



V: High-energy varistor
 Ft: Thermal fuse
 t^e: Thermal disconnection system
 MI: Disconnection indicator

Electrical Characteristics		
SPD type		2
Network		230/400 V 3-phase+N
AC system		TNS
Nominal line voltage	Un	230 Vac
Max. AC operating voltage	Uc	385 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Residual Current Leakage current to Ground	I _{pe}	< 1 mA
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	160 kA
Connection mode(s)		L/PE and N/PE
Protection level @ I _n (8/20μs)	U _p	1.8 kV
Admissible short-circuit current	I _{sc}	25 000 A
Mechanical Characteristics		
Technology		MOV
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM40-385
Remote signaling of disconnection		option DS44S-385 : output on changeover contact
Dimensions		See diagram
Weight		0.370 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		UL Recognized
Part number		
461202		

