






Type 2 PV surge protector

CITEL

DS50PVS-1500/51

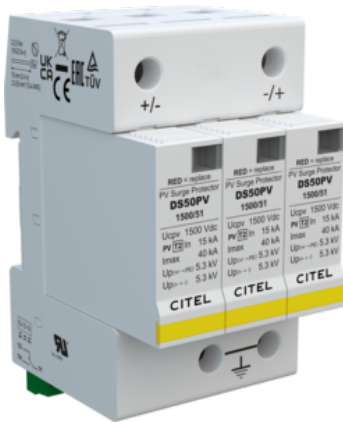

- Type 2 surge protector for PV
- In: 15kA / Imax: 40kA
- Pluggable
- Remote signaling
- IEC 61643-31, EN 61643-31, EN 50539-11 and UL1449 ed.5 certified



V: High-energy varistor
 Ft: Thermal fuse
 t*: Thermal disconnection system
 MI: Disconnection indicator C: Remote signal contact

Electrical Characteristics	
SPD type	2
Network	PV network 1250 Vdc
Nominal PV voltage	Uocstc 1250 Vdc
Max. PV operating voltage	Ucpv 1500 Vdc
Residual Current Leakage current to Ground	Ipe < 0.1 mA
PV Permanent Operating current Current consumption at Ucpv	Icpv < 0.1 mA
Follow current	If None
Nominal discharge current 15 x 8/20 μ s impulses	In 15 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax 40 kA
Current withstand short circuit PV	Iscpv 15 000 A
Connection mode(s)	+/-/PE
Protection mode(s)	Common/Differential mode
Protection level +/- @ In (8/20 μ s)	Up 5.3 kV
Mechanical Characteristics	
Technology	MOV
Connection to Network	By screw terminals: 2.5-25mm ² / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection SPD of the PV line
Disconnection indicator	3 mechanical indicators
Spare module(s)	DSM50PV-1500/51
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Weight	0.334 kg
Disconnectors	
Thermal disconnector	Internal
Back-up protection device	Without
Standards	
Standards compliance	IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification	UL1449 ed.5
Part number	
480571	

