




# Coordination inductor

# CITEL

## DSH2x16



- ↳ Coordination inductors for surge protectors
- ↳ For use with the DS series
- ↳ 2 x 16 A

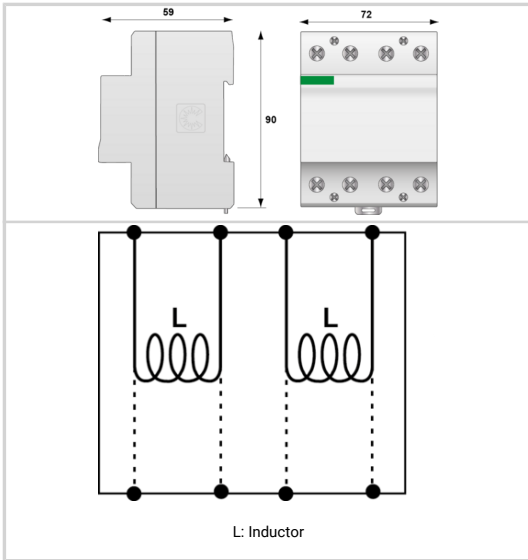

| Electrical Characteristics |    |   |
|----------------------------|----|---|
| Max. AC operating voltage  | Uc | 500 Vac                                 |
| Max. load current @25°C    | IL | 2 x 16 A                                |
| Mechanical Characteristics |    |   |
| Connection to Network      |    | By screw terminals: 6-35mm <sup>2</sup> |
| Format                     |    | 1-pole modular box                      |
| Mounting                   |    | Symmetrical rail 35 mm (EN 60715)       |
| Housing material           |    | Thermoplastic UL94 V-0                  |
| Operating temperature      | Tu | -40/+85°C                               |
| Protection rating          |    | IP20                                    |
| Wiring mode                |    | 1 DSH in series on 2 active wires       |
| Dimensions                 |    | See diagram                             |
| Weight                     |    | 0.37 kg                                 |
| Part number                |    |   |
| 2690                       |    |   |

