




# 1-pair DIN rail plug-in Data surge protector

# CITEL

## DLATS1-170

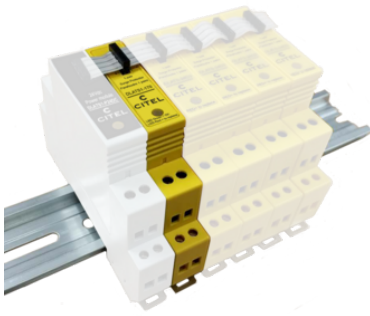

- ▶ 1-pair data line/telecom surge protection
- ▶ Local and Remote signaling of SPD status
- ▶ DIN rail mounting, Screw connect status
- ▶ Plug-in module
- ▶ 1 monitoring module + SPD modules (up to 48) + bus
- ▶ Discharge current  $I_{max}/I_n$ : 20 kA / 5kA
- ▶ Complies with IEC/EN 61643-21 and UL497A



	<table border="1"> <thead> <tr> <th colspan="2">Electrical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Network</td> <td>RTC, ADSL2, VDSL2</td> </tr> <tr> <td>Nominal line voltage</td> <td><math>U_n</math> 150 V</td> </tr> <tr> <td>Max. DC operating voltage</td> <td><math>U_c</math> 170 Vdc</td> </tr> <tr> <td>Max. frequency</td> <td>f max. 10 MHz</td> </tr> <tr> <td>Insertion loss</td> <td>&lt; 1 dB</td> </tr> <tr> <td>Max. load current @25°C</td> <td><math>I_L</math> 300 mA</td> </tr> <tr> <td>Max. discharge current max. withstand @ 8/20 μs by pole</td> <td><math>I_{max}</math> 20 kA</td> </tr> <tr> <td>Line inductance</td> <td>No</td> </tr> <tr> <td>Protection mode(s)</td> <td>Common/Differential mode</td> </tr> <tr> <td>Protection level @ <math>I_n</math> (8/20 μs)</td> <td>Up L/L 220 V</td> </tr> <tr> <td>Impulse current 2 x 10/350 μs Test - D1 Category</td> <td><math>I_{imp}</math> 5 kA</td> </tr> <tr> <td>Nominal discharge current C2 Category</td> <td><math>I_n</math> 5 kA</td> </tr> <tr> <td>Line/Line Nominal discharge current C2 Category</td> <td><math>I_n</math> L/L 5 kA</td> </tr> <tr> <td>Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category</td> <td><math>I_n</math> L/PE 5 kA</td> </tr> </tbody> </table>	Electrical Characteristics		Network	RTC, ADSL2, VDSL2	Nominal line voltage	$U_n$ 150 V	Max. DC operating voltage	$U_c$ 170 Vdc	Max. frequency	f max. 10 MHz	Insertion loss	< 1 dB	Max. load current @25°C	$I_L$ 300 mA	Max. discharge current max. withstand @ 8/20 μs by pole	$I_{max}$ 20 kA	Line inductance	No	Protection mode(s)	Common/Differential mode	Protection level @ $I_n$ (8/20 μs)	Up L/L 220 V	Impulse current 2 x 10/350 μs Test - D1 Category	$I_{imp}$ 5 kA	Nominal discharge current C2 Category	$I_n$ 5 kA	Line/Line Nominal discharge current C2 Category	$I_n$ L/L 5 kA	Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category	$I_n$ L/PE 5 kA		
Electrical Characteristics																																	
Network	RTC, ADSL2, VDSL2																																
Nominal line voltage	$U_n$ 150 V																																
Max. DC operating voltage	$U_c$ 170 Vdc																																
Max. frequency	f max. 10 MHz																																
Insertion loss	< 1 dB																																
Max. load current @25°C	$I_L$ 300 mA																																
Max. discharge current max. withstand @ 8/20 μs by pole	$I_{max}$ 20 kA																																
Line inductance	No																																
Protection mode(s)	Common/Differential mode																																
Protection level @ $I_n$ (8/20 μs)	Up L/L 220 V																																
Impulse current 2 x 10/350 μs Test - D1 Category	$I_{imp}$ 5 kA																																
Nominal discharge current C2 Category	$I_n$ 5 kA																																
Line/Line Nominal discharge current C2 Category	$I_n$ L/L 5 kA																																
Nominal Discharge Current, X-C (Line/Earth) 8/20 μs Test x 10 - C2 Category	$I_n$ L/PE 5 kA																																
<p> <b>G:</b> 3-electrode gas tube  <b>Gb:</b> 2-electrode gas tube  <b>PTC:</b> Thermal resistor  <b>R:</b> Resistor  <b>D:</b> Clamping diode  <b>Vi:</b> Indicator         </p>	<table border="1"> <thead> <tr> <th colspan="2">Mechanical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Technology</td> <td>GDT+Clamping diode+PTC (thermal resistor) + Resistor</td> </tr> <tr> <td>SPD configuration</td> <td>1-pair+shielded</td> </tr> <tr> <td>Connection to Network</td> <td>By screw terminal: cross section 0.5-2.5mm<sup>2</sup></td> </tr> <tr> <td>Format</td> <td>Plug-in DIN box</td> </tr> <tr> <td>Mounting</td> <td>Symmetrical rail 35 mm (EN 60715)</td> </tr> <tr> <td>Housing material</td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating temperature</td> <td><math>T_u</math> -40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td>Transmission cut-off - fault mode 2 (short circuit)</td> </tr> <tr> <td>Disconnection indicator</td> <td>Red light on</td> </tr> <tr> <td>Spare module(s)</td> <td>DLATS1M-170</td> </tr> <tr> <td>Remote signaling of disconnection</td> <td>Trough control module</td> </tr> <tr> <td>Remote signaling of disconnection via control module</td> <td>Yes</td> </tr> <tr> <td>Dimensions</td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td>0.067 kg</td> </tr> </tbody> </table>	Mechanical Characteristics		Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor	SPD configuration	1-pair+shielded	Connection to Network	By screw terminal: cross section 0.5-2.5mm <sup>2</sup>	Format	Plug-in DIN box	Mounting	Symmetrical rail 35 mm (EN 60715)	Housing material	Thermoplastic UL94 V-0	Operating temperature	$T_u$ -40/+85°C	Protection rating	IP20	Failsafe mode	Transmission cut-off - fault mode 2 (short circuit)	Disconnection indicator	Red light on	Spare module(s)	DLATS1M-170	Remote signaling of disconnection	Trough control module	Remote signaling of disconnection via control module	Yes	Dimensions	See diagram	Weight	0.067 kg
Mechanical Characteristics																																	
Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor																																
SPD configuration	1-pair+shielded																																
Connection to Network	By screw terminal: cross section 0.5-2.5mm <sup>2</sup>																																
Format	Plug-in DIN box																																
Mounting	Symmetrical rail 35 mm (EN 60715)																																
Housing material	Thermoplastic UL94 V-0																																
Operating temperature	$T_u$ -40/+85°C																																
Protection rating	IP20																																
Failsafe mode	Transmission cut-off - fault mode 2 (short circuit)																																
Disconnection indicator	Red light on																																
Spare module(s)	DLATS1M-170																																
Remote signaling of disconnection	Trough control module																																
Remote signaling of disconnection via control module	Yes																																
Dimensions	See diagram																																
Weight	0.067 kg																																
<p>Connection ribbons available:</p> <table border="1"> <thead> <tr> <th>Nb of pole</th> <th>Ref. Ribbon</th> </tr> </thead> <tbody> <tr> <td>2 - 5</td> <td>R-BUS 5P (301134)</td> </tr> <tr> <td>6 - 10</td> <td>R-BUS 10P (301133)</td> </tr> <tr> <td>11 - 25</td> <td>R-BUS 25P (301135)</td> </tr> <tr> <td>26 - 49</td> <td>R-BUS 49P (301143)</td> </tr> </tbody> </table>	Nb of pole	Ref. Ribbon	2 - 5	R-BUS 5P (301134)	6 - 10	R-BUS 10P (301133)	11 - 25	R-BUS 25P (301135)	26 - 49	R-BUS 49P (301143)	<table border="1"> <thead> <tr> <th colspan="2">Standards</th> </tr> </thead> <tbody> <tr> <td>Standards compliance</td> <td>IEC 61643-21 / EN 61643-21 / UL497A</td> </tr> <tr> <td>Part number</td> <td>6415051</td> </tr> </tbody> </table>	Standards		Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A	Part number	6415051																
Nb of pole	Ref. Ribbon																																
2 - 5	R-BUS 5P (301134)																																
6 - 10	R-BUS 10P (301133)																																
11 - 25	R-BUS 25P (301135)																																
26 - 49	R-BUS 49P (301143)																																
Standards																																	
Standards compliance	IEC 61643-21 / EN 61643-21 / UL497A																																
Part number	6415051																																

