



MLPCH2-230L-V/DL

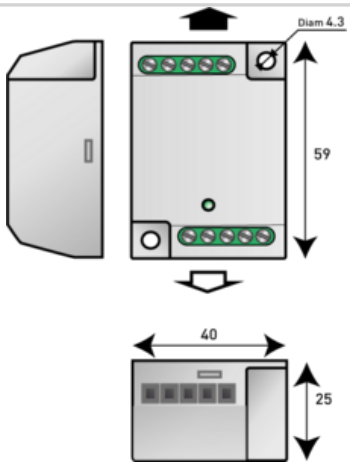

- Type 2 (or 3) surge protector for Class 2 LED Lighting
- Combined AC/Dateline surge protection
- DALI, DMX, RS485, 0-10V data lines compliance
- Optimized coordination with driver
- Compact dimensions
- Screw connection
- Max. discharge current 10 kA
- Certifié IEC 61643-11 and IEC 61643-21

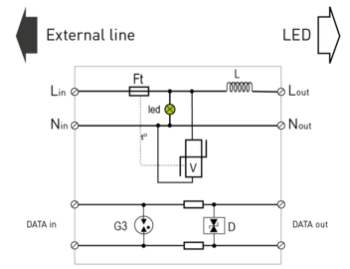

	<table border="1"> <thead> <tr> <th colspan="2">Electrical Characteristics</th> </tr> </thead> <tbody> <tr> <td>Network</td> <td>230 V single-phase</td> </tr> <tr> <td>AC system</td> <td>TT-TN</td> </tr> <tr> <td>Max. Data operating voltage</td> <td>Uc 28 Vdc</td> </tr> <tr> <td>Max. AC operating voltage</td> <td>Uc 320 Vac</td> </tr> <tr> <td>Max. load current @25°C</td> <td>IL 2.5 A</td> </tr> <tr> <td>Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection</td> <td>UT 335 Vac withstand</td> </tr> <tr> <td>Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection</td> <td>UT 440 Vac disconnection</td> </tr> <tr> <td>Residual Current Leakage current to Ground</td> <td>Ipe None</td> </tr> <tr> <td>Nominal discharge current 15 x 8/20 μs impulses</td> <td>In 5 kA</td> </tr> <tr> <td>Max. discharge current max. withstand @ 8/20 μs by pole</td> <td>Imax 10 kA</td> </tr> <tr> <td>Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs</td> <td>Uoc 10 kV</td> </tr> <tr> <td>Protection mode(s)</td> <td>Differential Mode</td> </tr> <tr> <td>Protection level @ In (8/20 μs)</td> <td>Up L/L 50 V</td> </tr> <tr> <td>Protection level L/N @ In (8/20 μs)</td> <td>Up L/N 1.5 kV</td> </tr> <tr> <td>Nominal discharge current C2 Category</td> <td>In 5 kA</td> </tr> <tr> <td>Admissible short-circuit current</td> <td>Iscrc 10 000 A</td> </tr> <tr> <th colspan="2">Mechanical Characteristics</th> </tr> <tr> <td>Technology</td> <td>MOV+GDT</td> </tr> <tr> <td>Connection to Network</td> <td>By screw terminal: 1.5mm<sup>2</sup> max.</td> </tr> <tr> <td>Mounting</td> <td>On plate</td> </tr> <tr> <td>Housing material</td> <td>Thermoplastic UL94 V-0</td> </tr> <tr> <td>Operating temperature</td> <td>Tu -40/+85°C</td> </tr> <tr> <td>Protection rating</td> <td>IP20</td> </tr> <tr> <td>Failsafe mode</td> <td>Disconnection, Green Led OFF and power cut off</td> </tr> <tr> <td>Disconnection indicator</td> <td>LED green OFF and AC network cut-off</td> </tr> <tr> <td>Dimensions</td> <td>See diagram</td> </tr> <tr> <td>Weight</td> <td>0.056 kg</td> </tr> <tr> <th colspan="2">Standards</th> </tr> <tr> <td>Standards compliance</td> <td>IEC 61643-11 / EN 61643-11 / IEC 61643-21 / EN 61643-21 / UL1449 ed.5</td> </tr> <tr> <td>Certification</td> <td>KEMA</td> </tr> <tr> <td>Part number</td> <td><b>838223</b></td> </tr> </tbody> </table>	Electrical Characteristics		Network	230 V single-phase	AC system	TT-TN	Max. Data operating voltage	Uc 28 Vdc	Max. AC operating voltage	Uc 320 Vac	Max. load current @25°C	IL 2.5 A	Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand	Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection	Residual Current Leakage current to Ground	Ipe None	Nominal discharge current 15 x 8/20 μs impulses	In 5 kA	Max. discharge current max. withstand @ 8/20 μs by pole	Imax 10 kA	Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc 10 kV	Protection mode(s)	Differential Mode	Protection level @ In (8/20 μs)	Up L/L 50 V	Protection level L/N @ In (8/20 μs)	Up L/N 1.5 kV	Nominal discharge current C2 Category	In 5 kA	Admissible short-circuit current	Iscrc 10 000 A	Mechanical Characteristics		Technology	MOV+GDT	Connection to Network	By screw terminal: 1.5mm <sup>2</sup> max.	Mounting	On plate	Housing material	Thermoplastic UL94 V-0	Operating temperature	Tu -40/+85°C	Protection rating	IP20	Failsafe mode	Disconnection, Green Led OFF and power cut off	Disconnection indicator	LED green OFF and AC network cut-off	Dimensions	See diagram	Weight	0.056 kg	Standards		Standards compliance	IEC 61643-11 / EN 61643-11 / IEC 61643-21 / EN 61643-21 / UL1449 ed.5	Certification	KEMA	Part number	<b>838223</b>
Electrical Characteristics																																																																	
Network	230 V single-phase																																																																
AC system	TT-TN																																																																
Max. Data operating voltage	Uc 28 Vdc																																																																
Max. AC operating voltage	Uc 320 Vac																																																																
Max. load current @25°C	IL 2.5 A																																																																
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand																																																																
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection																																																																
Residual Current Leakage current to Ground	Ipe None																																																																
Nominal discharge current 15 x 8/20 μs impulses	In 5 kA																																																																
Max. discharge current max. withstand @ 8/20 μs by pole	Imax 10 kA																																																																
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	Uoc 10 kV																																																																
Protection mode(s)	Differential Mode																																																																
Protection level @ In (8/20 μs)	Up L/L 50 V																																																																
Protection level L/N @ In (8/20 μs)	Up L/N 1.5 kV																																																																
Nominal discharge current C2 Category	In 5 kA																																																																
Admissible short-circuit current	Iscrc 10 000 A																																																																
Mechanical Characteristics																																																																	
Technology	MOV+GDT																																																																
Connection to Network	By screw terminal: 1.5mm <sup>2</sup> max.																																																																
Mounting	On plate																																																																
Housing material	Thermoplastic UL94 V-0																																																																
Operating temperature	Tu -40/+85°C																																																																
Protection rating	IP20																																																																
Failsafe mode	Disconnection, Green Led OFF and power cut off																																																																
Disconnection indicator	LED green OFF and AC network cut-off																																																																
Dimensions	See diagram																																																																
Weight	0.056 kg																																																																
Standards																																																																	
Standards compliance	IEC 61643-11 / EN 61643-11 / IEC 61643-21 / EN 61643-21 / UL1449 ed.5																																																																
Certification	KEMA																																																																
Part number	<b>838223</b>																																																																
 <p>External line      LED</p> <p>Lin      L-out Nin      N-out</p> <p>DATA in      DATA out</p> <p>GSG: Specific Gas Tube G: Gas tube 2-pole G3: Gas tube 3-pole V: Varistor D: Clamping diode L: Inductor Ft: Thermal fuse t*: Thermal disconnection system LED: Status indicator</p>																																																																	