





CITEL

## Type 1+2 AC surge protector single-phase

## DS132R-120



- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Imp total : 25 kA
- Pluggable module for each phase
- Remote signaling (option)
- EN 61643-11, IEC 61643-11 compliance

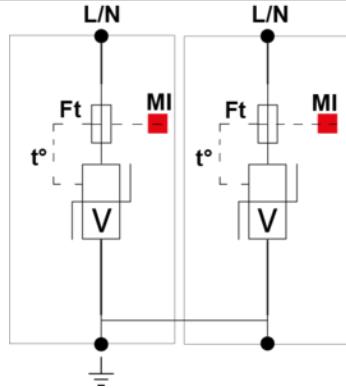

V: High-energy varistor  
 Ft: Thermal fuse  
 MI: Disconnection indicator

## Electrical Characteristics

SPD type	1+2
Network	120 V single-phase
AC system	TN
Nominal line voltage	Un 120 Vac
Max. AC operating voltage	Uc 150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 230 Vac disconnection
Follow current	If None
Nominal discharge current $15 \times 8/20 \mu\text{s impulses}$	In 20 kA
Max. discharge current max. withstand @ 8/20 $\mu\text{s}$ by pole	Imax 50 kA
Impulse current by pole max. withstand 10/350 $\mu\text{s}$ by pole	Imp 12.5 kA
Total lightning current max. total withstand @ 10/350 $\mu\text{s}$	Itotal 25 kA
Withstand on overvoltages IEEE C62.41.1	20 kV
Specific energy by pole max. withstand 10/350 $\mu\text{s}$	W/R 40 kJ/ohm
Connection mode(s)	L/PE and N/PE
Protection mode(s)	Common mode/Differential mode
Protection level N/PE @ In (8/20 $\mu\text{s}$ )	Up N/PE 0.9 kV
Protection level L/PE @ In (8/20 $\mu\text{s}$ )	Up L/PE 1.2 kV
Admissible short-circuit current	Isccr 25 000 A

## Mechanical Characteristics

Technology	MOV
SPD configuration	Single phase
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM130R-120
Remote signaling of disconnection	option DS132RS-120 : output on changeover contact
Dimensions	See diagram
Weight	0.248 kg

## Disconnectors

Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	Fuses Type gG - 125 A

## Standards

Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	
Part number	571602

