




- ✦ Type 2 AC multipolar surge protector
- ✦ In: 20 kA
- ✦ I_{max}: 50 kA
- ✦ Pluggable module for each phase
- ✦ Remote signaling option
- ✦ EN 61643-11, IEC 61643-11 certified

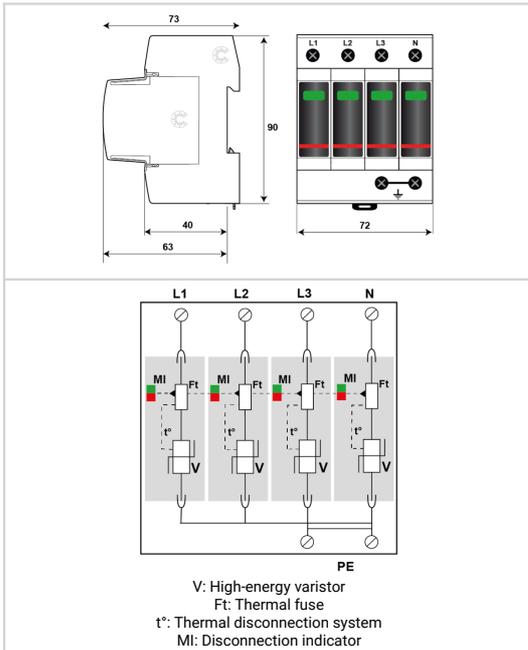

Electrical Characteristics		
SPD type	IEC	2
Network		480/830 V 3-phase+N
AC system		TNS
Max. AC operating voltage	U _c	530 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	700 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	920 Vac disconnection
Residual Current Leakage current to Ground	I _{pe}	< 1 mA
Follow current	I _f	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	200 kA
Protection mode(s)		L/PE and N/PE
Protection level N/PE @ I _n (8/20μs)	U _p N/PE	2.4 kV
Protection level L/PE @ I _n (8/20μs)	U _p L/PE	2.4 kV
Protection level N/PE at 5 kA @ 5 kA (8/20μs)	U _p -5kA	2 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20μs)	U _p -5kA	2 kV
Admissible short-circuit current	I _{scrr}	50 000 A
UL Electrical Characteristics		
UL Category		UL Recognized Type 4CA
Maximum Continuous Operating Voltage(L-L/L-N)	MCOV	1060 V
Maximum Continuous Operating Voltage(L-G/N-G)	MCOV	530 V
Maximum Limiting Voltage(L-L/L-N)	MLV	5170 V
Maximum Limiting Voltage(L-G/N-G)	MLV	3120 V
Nominal discharge current	I _n	20 kA
Mechanical Characteristics		
Technology		MOV
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDAC50-530
Remote signaling of disconnection		option DAC50S-40-530 : output on changeover contact
Dimensions		See diagram - 4TE (EN43880)
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11
Certification		ÖVE / UL
Part number		
821110514		