





CITEL

Type 2 AC surge protector - 3-phase+N

DACF25-31-275



- Type 2 AC Multipolar surge protector
- In : 15 kA
- I_{max} total : 50 kA
- Internal Fuse
- Pluggable module for each phase
- Remote signaling option
- EN 61643-11, IEC 61643-11 certified
- UL1449 ed.5 compliance

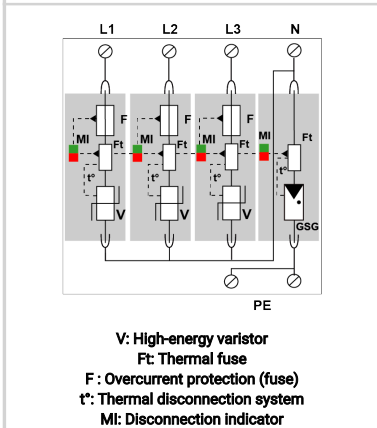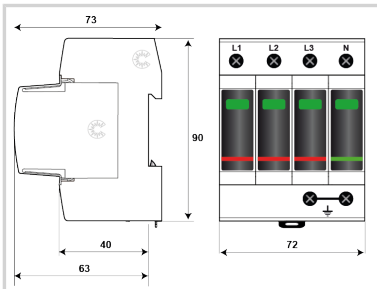

Electrical Characteristics

SPD type	IEC	2
Network		230/400 V 3-phase+N
AC system		TT-TNS
Max. AC operating voltage	U _c	275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) <i>Without disconnection or with safety disconnection</i>	UT	1200 V/300A/200 ms withstand
Residual Current <i>Leakage current to Ground</i>	I _{pe}	None
Follow current	I _f	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	15 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	25 kA
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I _{max} Total	50 kA
Connection mode(s)		L/N and N/PE
Protection level L/N <i>@ I_n (8/20μs)</i>	Up L/N	1.25 kV
Protection level N/PE <i>@ I_n (8/20μs)</i>	Up N/PE	1.5 kV
Residual voltage L/N at 5 kA <i>@ 5 kA (8/20μs)</i>	Up-5kA	1 kV
Protection level N/PE at 5 kA <i>@ 5 kA (8/20μs)</i>	Up-5kA	1 kV
Admissible short-circuit current	I _{sc}	100 000 A

Mechanical Characteristics

Technology		MOV+GDT
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDACF25-275 + MDAC50G-255(KEMA)/F25
Remote signaling of disconnection		option DACF25S-31-275: output on changeover contact
Wiring for remote signaling		1.5 mm ² max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 4TE (EN43880)

Disconnectors

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		internal (equivalent AC rating : 40 A, gG Type)

Standards

Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		KEMA

Part number

821410234

