





# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLAWS1-06D3



- ▶ 1-pair Surge protection
- ▶ Pluggable protection module
- ▶ Optical fault indication
- ▶ Indirect shield connection
- ▶ Visual indicator in failsafe behaviour
- ▶ Indirect earthing
- ▶ Current circuit disconnection when module is unplugged
- ▶ Conforms to IEC 61643-21, VDE 0845-3-1 and UL497B

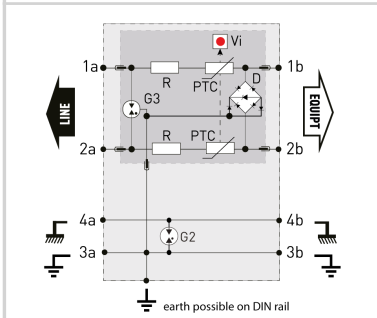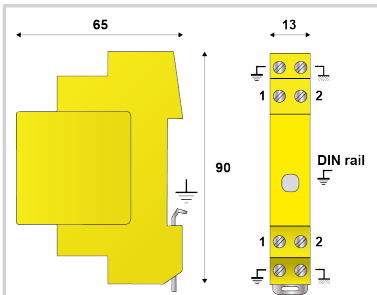

**G:** 3-electrode gas tube  
**Gb:** 2-electrode gas tube  
**PTC:** Thermal resistor  
**R:** Resistor  
**D:** Clamping diode  
**VI:** Indicator

Electrical Characteristics		
Network		RS422
Nominal line voltage	Un	6 V
Max. DC operating voltage	Uc	8 Vdc
Cut-off frequency -3dB, 100 ohm system	f max.	> 115 MHz
Cut-off frequency -1dB, 100 ohm system	f max.	> 50 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	300 mA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA
Nominal discharge current C2 Category	In	5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	5 kA
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-Y (Line/Line)	Up	20 V
Protection Level C3 (10/1000µs), 300 applications@10 A, Y-C (Line/Earth)	Up	20 V
Impulse current D1 (10/350µs), 2 applications, X-C (Line/Earth)	Iimp	5 kA
Line/Line Nominal discharge current C2 Category	In L/L	5 kA
Line resistance (± 10%)		4.7 Ohm
Mechanical Characteristics		
Disconnection		Specific version with line cut-off in case of removal plug-in module
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm²
Format		Din Rail Base-Plug-in Module
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Opening line - transmission cut-off - fault mode 2
With line cut-off in case of removal plug-in module		Yes
Disconnection indicator		Red light on
Spare module(s)		DLAWS1M-06D3
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Certification		UL Listed
Environmental standards		EU RoHS
Part number		
<b>6419011</b>		

