





CITEL

Type 2 PV surge protector

DS50PVS- 800G/51

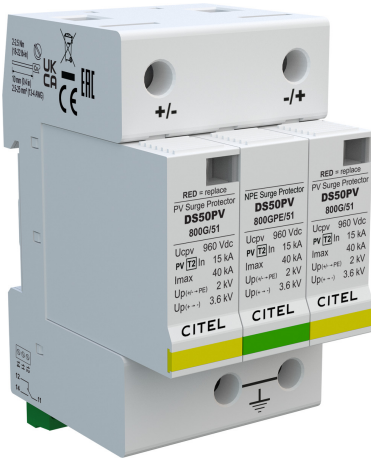

- Type 2 surge protector for PV
- In : 15kA / I_{max} : 40kA
- Pluggable
- Remote signaling
- UL1149 ed.5 certified
- IEC 61643-31, EN 61643-31, EN 50539-11, UL1449 ed.5 compliance

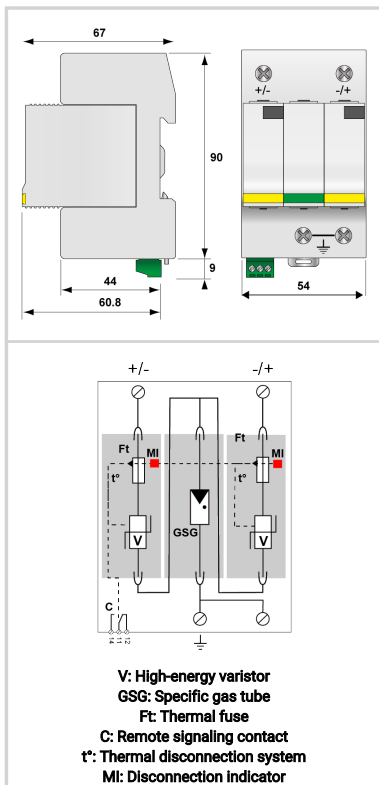

Electrical Characteristics

SPD type	IEC	2
Network		PV network 800 Vdc
Nominal PV voltage	Uocstc	800 Vdc
Max. PV operating voltage	Ucpv	960 Vdc
Residual Current Leakage current to Ground	Ipe	None
PV Permanent Operating current Current consumption at Ucpv	Icpv	< 0.1 mA
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	15 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	40 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	60 kA
Current withstand short circuit PV	Iscpv	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common/Differential mode
Protection level +/- @ In (8/20μs)	Up	3.6 kV
Protection level +/-PE (-/PE) @ In (8/20μs)	Up	2 kV

Mechanical Characteristics

Technology		MOV+GDT
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50PV-800G/51
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram

Disconnectors

Thermal disconnector		Internal
Back-up protection device		Without

Standards

Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		

Part number

480291

