




Type 2 PV surge protector

CITEL

DS50PVS-500/51



- ↳ Type 2 surge protector for PV
- ↳ In : 15kA / I_{max} : 40kA
- ↳ Pluggable
- ↳ Remote signaling
- ↳ UL1149 ed.5 certified
- ↳ EN 61643-31, NF EN 50539-11 compliant

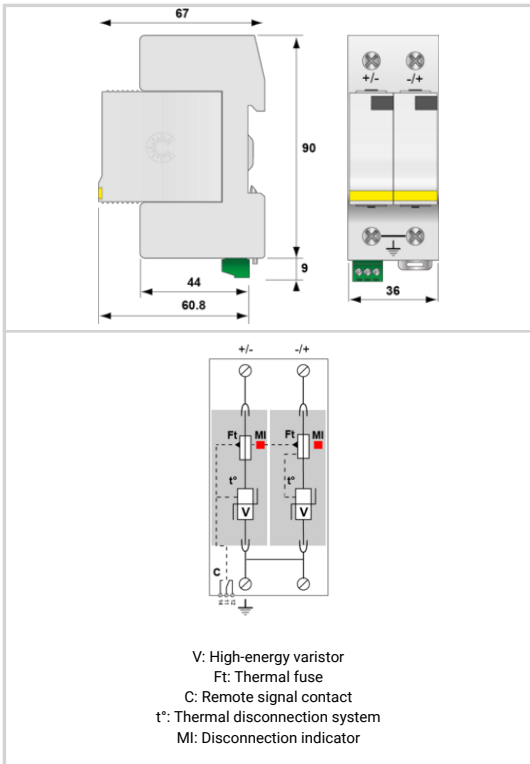

Electrical Characteristics		
SPD type		2
Network		PV network 500 Vdc
Nominal PV voltage	U _{ocstc}	500 Vdc
Max. PV operating voltage	U _{cpv}	600 Vdc
Residual Current	I _{pe}	< 0.1 mA
Leakage current to Ground		
PV Permanent Operating current	I _{cpv}	< 0.1 mA
Current consumption at U _{cpv}		
Follow current	I _f	None
Nominal discharge current	I _n	15 kA
15 x 8/20 μs impulses		
Max. discharge current	I _{max}	40 kA
max. withstand @ 8/20 μs by pole		
Total Maximum discharge current	I _{max Total}	60 kA
max. total withstand @ 8/20 μs		
Current withstand short circuit PV	I _{scpv}	15 000 A
Connection mode(s)		+/-/PE
Protection mode(s)		Common mode
Protection level +/-PE (-/PE)	U _p	2.2 kV
@ I _n (8/20μs)		
Mechanical Characteristics		
Technology		MOV
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection SPD of the PV line
Disconnection indicator		2 mechanical indicators
Spare module(s)		DSM50PV-500/51
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Without
Standards		
Standards compliance		IEC 61643-31 / EN 61643-31 / EN 50539-11 / UL1449 ed.5
Certification		UL Recognized
Part number		
480171		

