




## Type 1+2+3 AC surge protector - 3-phase+N

# CITEL

## DACN1-25CVGS-31-150



- Type 1 + 2+3 AC surge protector
- VG Technology
- $i_{imp}$ : 25 kA on 10/350 $\mu$ s impulse
- $I_n$ : 25 kA
- Optimized to TOV
- No leakage current
- Monobloc
- Remote signaling
- EN 61643-11, IEC 61643-11 complied

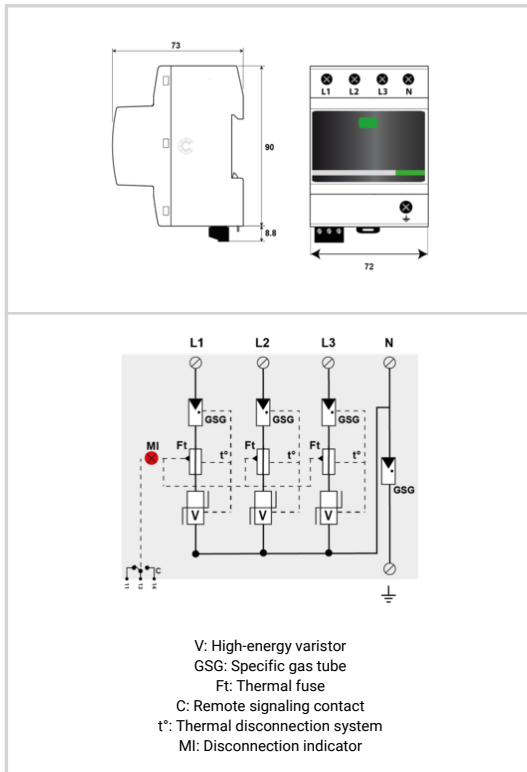

Electrical Characteristics		
SPD type		1+2+3
Network		120/208 V 3-phase+N
AC system		TT-TNS
Max. AC operating voltage	Uc	150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	230 Vac withstand
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 $\mu$ s impulses	I <sub>n</sub>	25 kA
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	I <sub>max</sub>	100 kA
Impulse current by pole max. withstand 10/350 $\mu$ s by pole	i <sub>imp</sub>	25 kA
Total lightning current max. total withstand @ 10/350 $\mu$ s	I <sub>total</sub>	100 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 $\mu$ s - 8/20 $\mu$ s	Uoc	6 kV
Protection level L/N @ I <sub>n</sub> (8/20 $\mu$ s)	U <sub>p</sub> L/N	1.5 kV
Protection level N/PE @ I <sub>n</sub> (8/20 $\mu$ s)	U <sub>p</sub> N/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	50 000 A
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm <sup>2</sup> (35mm <sup>2</sup> rigid)
Format		Monobloc modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator - Red/Green
Remote signaling of disconnection		Output on changeover contact
Wiring for remote signaling		1.5 mm <sup>2</sup> max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Weight		0.658 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		315 A max. - Fuses Type gG / or SFD1-25S
Standards		
Standards compliance		EN 61643-11 / IEC 61643-11
Part number		
64152		

