




Compact 3-phase+N Type 2 surge protector - 230/400 V - Pluggable

CITEL

DS440-280



- ↳ Compact 3-Phase Type 2 surge protector
- ↳ In : 20 kA
- ↳ I_{max} : 40 kA
- ↳ Common mode
- ↳ Pluggable module
- ↳ Remote Signaling contact option
- ↳ EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

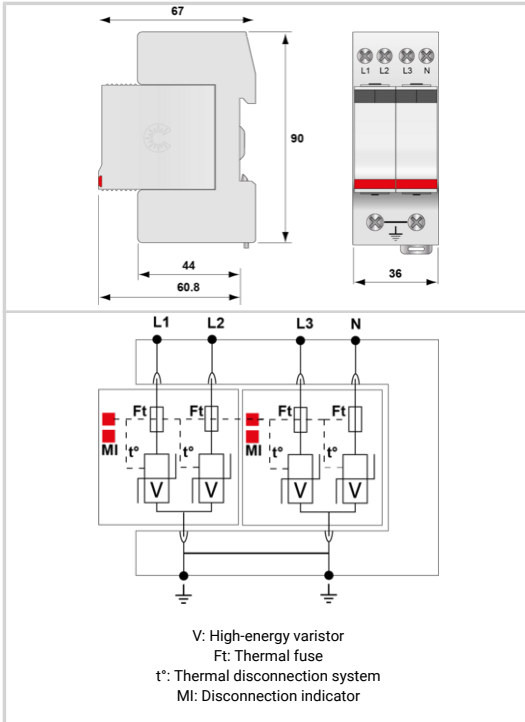

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase
AC system	TN
Nominal line voltage	Un 230 Vac
Max. AC operating voltage	Uc 280 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Residual Current Leakage current to Ground	I _{pe} < 0.5 mA
Follow current	I _f None
Nominal discharge current 15 x 8/20 μs impulses	I _n 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max} 40 kA
Connection mode(s)	L/PE and N/PE
Protection mode(s)	Common mode
Protection level CM/DM @ I _n (8/20μs)	U _{p mc /md} 1.3 kV
Admissible short-circuit current	I _{sc cr} 10 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 1.5-10mm ² (L/N) or 2.5-25mm ² (PE)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	4 mechanical indicators
Spare module(s)	DSM440-280
Remote signaling of disconnection	Option DS440S-280 : output on changeover contact
Dimensions	See diagram
Weight	0.235 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	50 A min. - 125 A max. - Fuses Type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	
Part number	
311102	

